

Article-No: 9380189n

Reflector luminaire




## APOLLO G2 DALI 1.3m PO 2x33W 060° 9600lm 840 TW5x2,5+2x1,5 class I

New generation of the proven APOLLO damp-proof reflector luminaire. Redesigned beautiful frame-end pieces made of PBT. Simple one-man assembly of the reflector with integrated plug and directional guide and captive, easy-to-close clips made of stainless steel. Seamless enclosed tubular housing made of white, fibre-glass reinforced, hardly inflammable, largely acid and alkali-resistant polyester resin. Protection class IP65. Reflector can be swiveled through 120°, with practical detent mechanism in 10° steps. Short, ageing-resistant silicone seals. Electronic ballast integrated. Particularly robust due to thermal decoupling of LED and converter. Through-wiring up to max. 5x2.5mm<sup>2</sup> + 2x1.5mm<sup>2</sup> possible. The permissible ambient temperature decreases by 1°C per 2A of the through-wiring. Variable mounting points with PRACHT CLAMP SYSTEM made of stainless steel, suitable for ceiling- and horizontal wall mounting, accessories for pendant and mounting rail installation available for order.

GTIN 4018098317845

Statistical product number 94054231

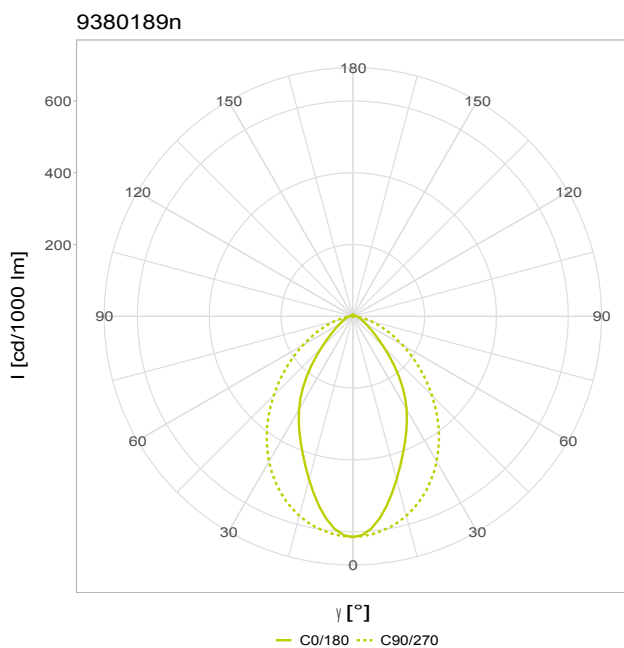

## DIMENSIONS AND WEIGHTS

Length	1260 mm
Width	232 mm
Height	142 mm
Net weight	4,40 kg

## OUTPUT

Luminous flux	9600 lm
Systempower	66 W
Efficacy	145 lm/W
Energy efficiency class of the light source	C

## ASSEMBLY AND MAINTENANCE

Optional mounting type	Pendulum mounting, mounting rail, horizontal Wall
Standard mounting	Ceiling

## LIGHT SOURCE

Luminaire type	LED
Number of light sources   LED rows   lamps	2
Colour temperature	4000 K
Colour rendering index	>80
Number of LEDs	192
Standard Deviation of Colour Matching (SDCM)	3
Control gear exchangeable	yes, by qualified person
Light source exchangeable	yes, by manufacturer

## LIGHTING ENGINEERING

Light distributor	with swivelling reflector
Light distribution angle	60 °
Light distribution	deep beam
Glare limitation UGR 4H 8H C0 C90	23 / 18

## MATERIAL

Cover material	PO - PRACHTOPAL
Housing material	GRP polyester
Housing colour	White RAL 9010

## CAPACITY

outdoor area	Protected outdoor area*
Rebuildable	false
IK-Impact resistance	IK08
Protection class (IP)	IP65
Use in animal husbandry	not suitable
Vandalism protection	false
Warranty	5 Years
Life expectancy B50 at 25° in hours (h)	
L90/B50 25°C	73730
L80/B50 25°C	>100000
L70/B50 25°C	>100000
Life expectancy B10 at 25° in hours (h)	
L90/B10 25°C	59851
L80/B10 25°C	>100000
L70/B10 25°C	>100000
Life expectancy B50 at 40° in hours (h)	
L90/B50 40°C	68190
L80/B50 40°C	>100000
L70/B50 40°C	>100000
max. lowest temperature	-25 °C
max. highest temperature	40 °C

## TECHNICAL DATA

ENEc	true
Dimming type	Dimming DALI Dimming DALI-2
Filament test	650 °C
Protection class	class I
Circuit Breaker B10A	6 Luminaires
Circuit Breaker B16A	11 Luminaires
Circuit Breaker C10A	10 Luminaires
Circuit Breaker C16A	18 Luminaires
Voltage spike protection U (L-PE)	2,0 kV
Voltage spike protection U (L-N)	1,0 kV
Through-wiring mm <sup>2</sup>	5x2,5+2x1,5
D-marking	true
Voltage type acc. ETIM	AC/DC
IFS suitable	true
Emergency light suitable (EL)	false
Rated voltage	220-240V 0/50/60 Hz

The right of error and later technical developments is reserved. 15.03.2024

Values may be extrapolated differently from TM21.



## PACKAGING

VPE 1	
Unit	Carton
Content quantity	1 Piece
Length	1,30 m
Width	0,26 m
Height	0,16 m
Weight	5,10 kg
VPE 2	
Unit	Pallet
Content quantity	28 Piece
Length	1,70 m
Width	0,80 m
Height	1,30 m
Weight	163,00 kg

## FURTHER PRODUCT INFORMATION

REACH-Info	false
REACH-Listdate	2023-06-29
Market labelling	CE
Product labelling	RoHS, WEEE

\* Protected outdoor area:  
a canopy protects the luminaire of direct solar radiation.  
It is to be ensured that for mounting beneath the edge,  
the luminaire does not withstand heavy rainfall. Typically a  
height difference of 0,5 times the roof overhang compared  
to the luminaire should not be exceeded.