

Article-No: 9381219d

Reflector luminaire




## APOLLO G2 DALI 1.3m PM 1x55W 030° 8100lm 840 TW5x2,5+2x1,5 class I

New generation of the proven APOLLO damp-proof reflector luminaire. Redesigned beautiful frame-end pieces made of PBT. Simple one-man assembly of the reflector with integrated plug and directional guide and captive, easy-to-close clips made of stainless steel. Seamless enclosed tubular housing made of white, fibre-glass reinforced, hardly inflammable, largely acid and alkali-resistant polyester resin. Protection class IP65. Reflector can be swiveled through 120°, with practical detent mechanism in 10° steps. Short, ageing-resistant silicone seals. Electronic ballast integrated. Particularly robust due to thermal decoupling of LED and converter. Through-wiring up to max. 5x2.5mm<sup>2</sup> + 2x1.5mm<sup>2</sup> possible. The permissible ambient temperature decreases by 1°C per 2A of the through-wiring. Variable mounting points with PRACHT CLAMP SYSTEM made of stainless steel, suitable for ceiling- and horizontal wall mounting, accessories for pendant and mounting rail installation available for order.

GTIN 4018098317326

Statistical product number 94054231

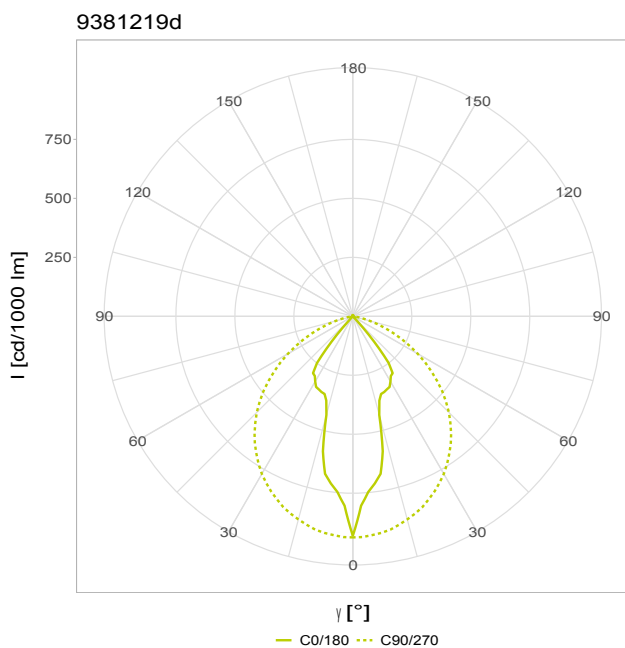

## DIMENSIONS AND WEIGHTS

Length	1260 mm
Width	105 mm
Height	152 mm
Net weight	2,70 kg

## OUTPUT

Luminous flux	8100 lm
Systempower	55 W
Efficacy	147 lm/W
Energy efficiency class of the light source	C

## ASSEMBLY AND MAINTENANCE

Optional mounting type	Pendulum mounting, mounting rail, horizontal Wall
Standard mounting	Ceiling

## LIGHT SOURCE

Luminaire type	LED
Number of light sources   LED rows   lamps	1
Colour temperature	4000 K
Colour rendering index	>80
Number of LEDs	144
Standard Deviation of Colour Matching (SDCM)	3
Control gear exchangeable	yes, by qualified person
Light source exchangeable	yes, by manufacturer

## LIGHTING ENGINEERING

Light distributor	with swivelling reflector
Light distribution angle	30 °
Light distribution	narrow beam
Glare limitation UGR 4H 8H C0 C90	26 / 14

## CAPACITY

outdoor area	Protected outdoor area*
Rebuildable	false
IK-Impact resistance	IK06
Protection class (IP)	IP65
Use in animal husbandry	not suitable
Vandalism protection	false
Warranty	5 Years
Life expectancy B50 at 25° in hours (h)	
L80/B50 25°C	>100000
L70/B50 25°C	>100000
Life expectancy B10 at 25° in hours (h)	
L80/B10 25°C	>100000
L70/B10 25°C	>100000
Life expectancy B50 at 45° in hours (h)	
L80/B50 45°C	87901
L70/B50 45°C	>100000
max. lowest temperature	-25 °C
max. highest temperature	45 °C

## MATERIAL

Cover material	PM - Polymethylmethacrylat
Housing material	GRP polyester
Housing colour	White RAL 9010

## TECHNICAL DATA

ENEC	true
Dimming type	Dimming DALI Dimming DALI-2
Filament test	650 °C
Protection class	class I
Circuit Breaker B10A	17 Luminaires
Circuit Breaker B16A	22 Luminaires
Circuit Breaker C10A	28 Luminaires
Circuit Breaker C16A	36 Luminaires
Voltage spike protection U (L-PE)	4,0 kV
Voltage spike protection U (L-N)	4,0 kV
Through-wiring mm <sup>2</sup>	5x2,5+2x1,5
D-marking	true
Voltage type acc. ETIM	AC/DC
IFS suitable	true
Emergency light suitable (EL)	false
Rated voltage	220-240V 0/50/60 Hz

## PACKAGING

VPE 1	
Unit	Carton
Content quantity	1 Piece
Length	1,30 m
Width	0,12 m
Height	0,16 m
Weight	3,20 kg
VPE 2	
Unit	Pallet
Content quantity	42 Piece
Length	1,70 m
Width	0,80 m
Height	1,30 m
Weight	155,00 kg

## FURTHER PRODUCT INFORMATION

---

REACH-Info	false
REACH-Listdate	2023-06-29
Market labelling	CE
Product labelling	RoHS, WEEE

\* Protected outdoor area:  
a canopy protects the luminaire of direct solar radiation. It is to be ensured that for mounting beneath the edge, the luminaire does not withstand heavy rainfall. Typically a height difference of 0,5 times the roof overhang compared to the luminaire should not be exceeded.

*The right of error and later technical developments is reserved. 15.03.2024*

Values may be extrapolated differently from TM21.

